


TO-220-3L Plastic-Encapsulate Transistors

2SB507 TRANSISTOR (PNP)

FEATURES

- Low Collector-Emitter Saturation Voltage
 $V_{ce(sat)} = -1V(MAX) @ I_C = -2A, I_B = -0.2A$
- DC Current Gain $h_{FE} = 40 \sim 320 @ I_C = -1A$
- Complementray to NPN 2SD313

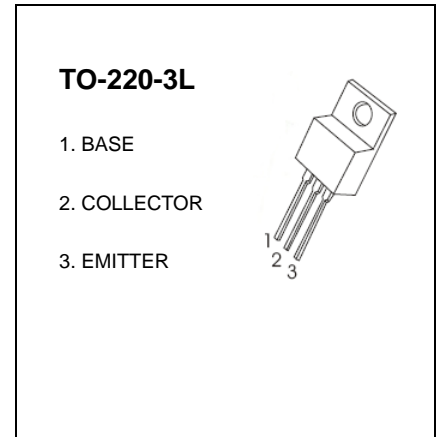

MAXIMUM RATINGS ($T_a = 25^\circ C$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-60	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-3	A
P_C	Collector Power Dissipation	1.75	W
T_J	Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature	-55-150	$^\circ C$

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$ unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -100\mu A, I_E = 0$	-60			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-60			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -100\mu A, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -20V, I_E = 0$			-100	μA
Collector cut-off current	I_{CEO}	$V_{CE} = -60V, I_E = 0$			-5	mA
Emitter cut-off current	I_{EBO}	$V_{EB} = -4V, I_C = 0$			-1	mA
DC current gain ⁽¹⁾	$h_{FE(1)}$ ⁽¹⁾	$V_{CE} = -2V, I_C = -1A$	40		320	
	$h_{FE(2)}$ ⁽¹⁾	$V_{CE} = -2V, I_C = -0.1A$	40			
Collector-emitter saturation voltage ⁽¹⁾	$V_{CE(sat)}$ ⁽¹⁾	$I_C = -2A, I_B = -200mA$			-1	V
Base-emitter voltage ⁽¹⁾	V_{BE} ⁽¹⁾	$V_{CE} = -2V, I_C = -1A$			-1.5	V
Transition frequency	f_T	$V_{CE} = -5V, I_C = -500mA, f = 1MHz$	5			MHz

⁽¹⁾Pulse Test: Pulse Width=300 μs , Duty Cycle $\leq 2.0\%$

CLASSIFICATION OF $h_{FE(1)}$

Rank	C	D	E	F
Range	40-80	60-120	100-200	160-320

TO-220-3L Package Outline Dimensions

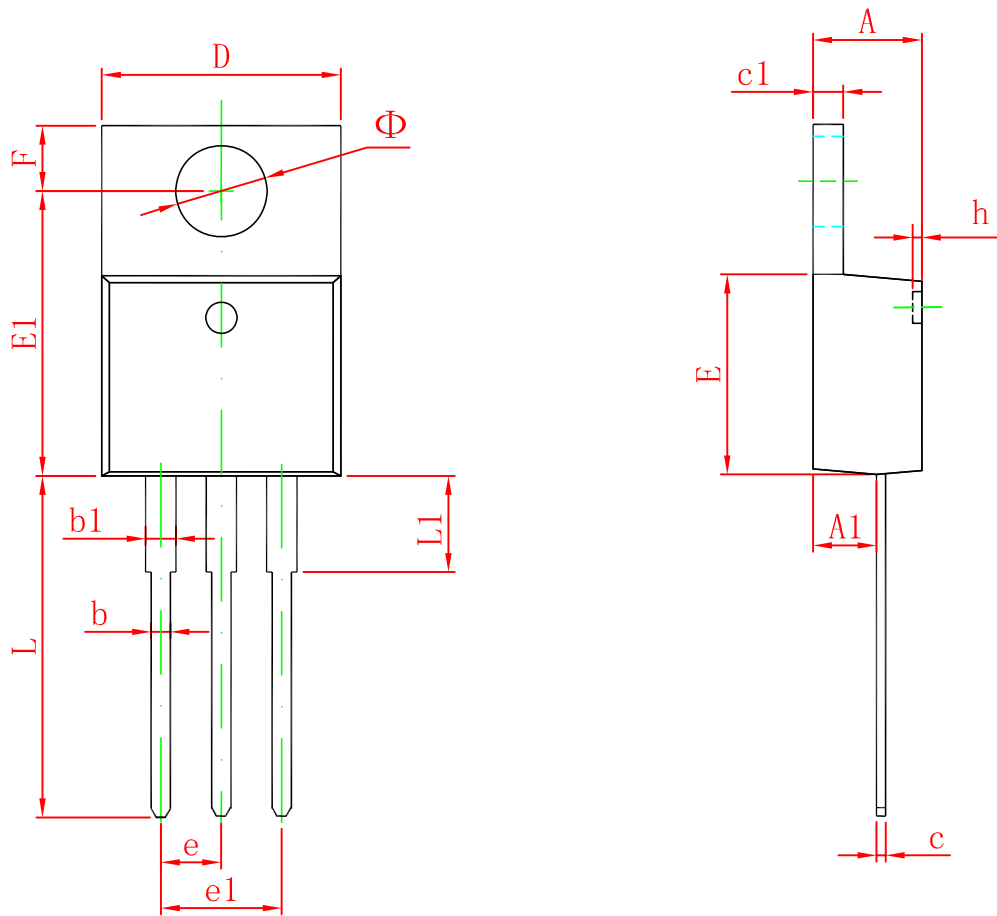

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
h	0.000	0.300	0.000	0.012
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
Φ	3.735	3.935	0.147	0.155