

TO-92L Plastic-Encapsulate Transistors


2SB764 TRANSISTOR (PNP)

FEATURES

- General Purpose Switching Application

TO – 92L

1. EMITTER
2. COLLECTOR
3. BASE



MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

| Symbol | Parameter | Value | Unit |
|-----------------|---|----------|----------------------|
| V_{CBO} | Collector-Base Voltage | -60 | V |
| V_{CEO} | Collector-Emitter Voltage | -50 | V |
| V_{EBO} | Emitter-Base Voltage | -5 | V |
| I_C | Collector Current | -1 | A |
| P_C | Collector Power Dissipation | 750 | mW |
| $R_{\theta JA}$ | Thermal Resistance From Junction To Ambient | 167 | $^{\circ}\text{C/W}$ |
| T_j | Junction Temperature | 150 | $^{\circ}\text{C}$ |
| T_{stg} | Storage Temperature | -55~+150 | $^{\circ}\text{C}$ |

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|--------------------------------------|---------------|--|-----|-----|------|---------------|
| Collector-base breakdown voltage | $V_{(BR)CBO}$ | $I_C=-10\mu\text{A}, I_E=0$ | -60 | | | V |
| Collector-emitter breakdown voltage | $V_{(BR)CEO}$ | $I_C=-1\text{mA}, I_B=0$ | -50 | | | V |
| Emitter-base breakdown voltage | $V_{(BR)EBO}$ | $I_E=-10\mu\text{A}, I_C=0$ | -5 | | | V |
| Collector cut-off current | I_{CBO} | $V_{CB}=-50\text{V}, I_E=0$ | | | -1 | μA |
| Emitter cut-off current | I_{EBO} | $V_{EB}=-4\text{V}, I_C=0$ | | | -1 | μA |
| DC current gain | $h_{FE(1)}$ | $V_{CE}=-2\text{V}, I_C=-50\text{mA}$ | 60 | | 320 | |
| | $h_{FE(2)}$ | $V_{CE}=-2\text{V}, I_C=-1\text{A}$ | 30 | | | |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_C=-500\text{mA}, I_B=-50\text{mA}$ | | | -0.7 | V |
| Base-emitter saturation voltage | $V_{BE(sat)}$ | $I_C=-500\text{mA}, I_B=-50\text{mA}$ | | | -1.2 | V |
| Collector output capacitance | C_{ob} | $V_{CB}=-10\text{V}, I_E=0, f=1\text{MHz}$ | | 20 | | pF |
| Transition frequency | f_T | $V_{CE}=-10\text{V}, I_C=-50\text{mA}$ | | 150 | | MHz |

CLASSIFICATION OF $h_{FE(1)}$


| RANK | D | E | F |
|-------|--------|---------|---------|
| RANGE | 60-120 | 100-200 | 160-320 |

TO-92L Package Outline Dimensions



| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|--------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 3.750 | 4.050 | 0.148 | 0.159 |
| A1 | 1.280 | 1.580 | 0.050 | 0.062 |
| b | 0.380 | 0.550 | 0.015 | 0.022 |
| b1 | 0.620 | 0.780 | 0.024 | 0.031 |
| c | 0.350 | 0.450 | 0.014 | 0.018 |
| D | 4.750 | 5.050 | 0.187 | 0.199 |
| D1 | 4.000 | | 0.157 | |
| E | 7.850 | 8.150 | 0.309 | 0.321 |
| e | 1.270 TYP. | | 0.050 TYP. | |
| e1 | 2.440 | 2.640 | 0.096 | 0.104 |
| L | 13.800 | 14.200 | 0.543 | 0.559 |
| Φ | | 1.600 | | 0.063 |
| h | 0.000 | 0.300 | 0.000 | 0.012 |

TO-92L Suggested Pad Layout

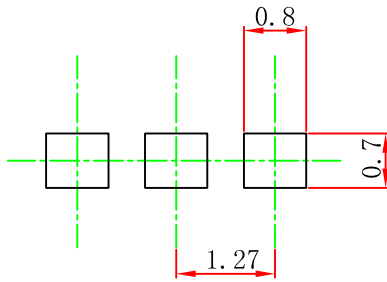

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.

NOTICE


JCET reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JCET does not assume any liability arising out of the application or use of any product described herein.

TO-92L PACKAGE TAPING DIMENSION



Dimensions are in millimeter

| A1 | A | T | P | P0 | P2 | F1 | F2 | W |
|-----|-----|-----|------|------|------|-----|-----|------|
| 4.9 | 8.0 | 3.9 | 12.7 | 12.7 | 6.35 | 2.5 | 2.5 | 18.0 |
| W0 | W1 | W2 | H | H0 | D0 | t1 | t2 | ΔP |
| 6.0 | 9.0 | 1.0 | 19.0 | 16.0 | 4.0 | 0.4 | 0.2 | 0 |

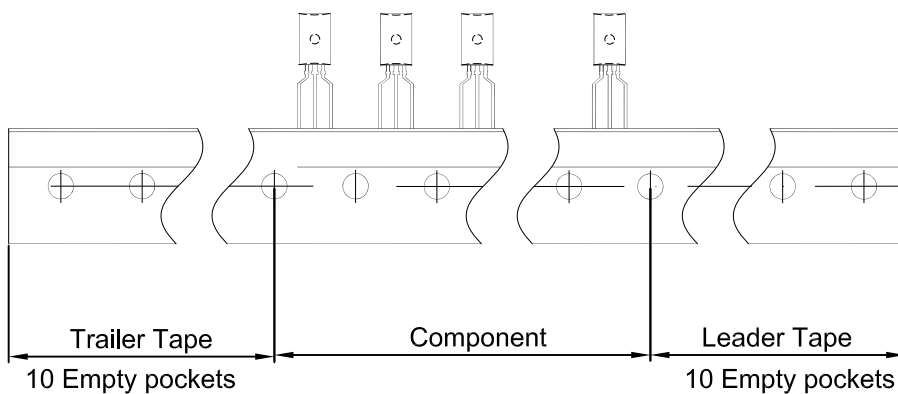

| Package | Box | Box Size(mm) | Carton | Carton Size(mm) |
|---------|----------|--------------|------------|-----------------|
| TO-92L | 2000 pcs | 333×203×42 | 20,000 pcs | 493×400×264 |